


ALL RESISTORS ±20% TOLERANCE UNLESS OTHERWISE SPECIFIED


⏏ DENOTES B-

⏏ DENOTES CHASSIS

NOTE
 S4-A TREBLE
 S4-B VOICE
 S4-C ALTO
 S4-D BASS
 ALL TONE BUTTONS SHOWN IN "LEFT" POSITION.

ALL VOLTAGES MEASURED FROM COMMON RETURN TO POINTS INDICATED WITH A D.C. VACUUM TUBE VOLTMETER.

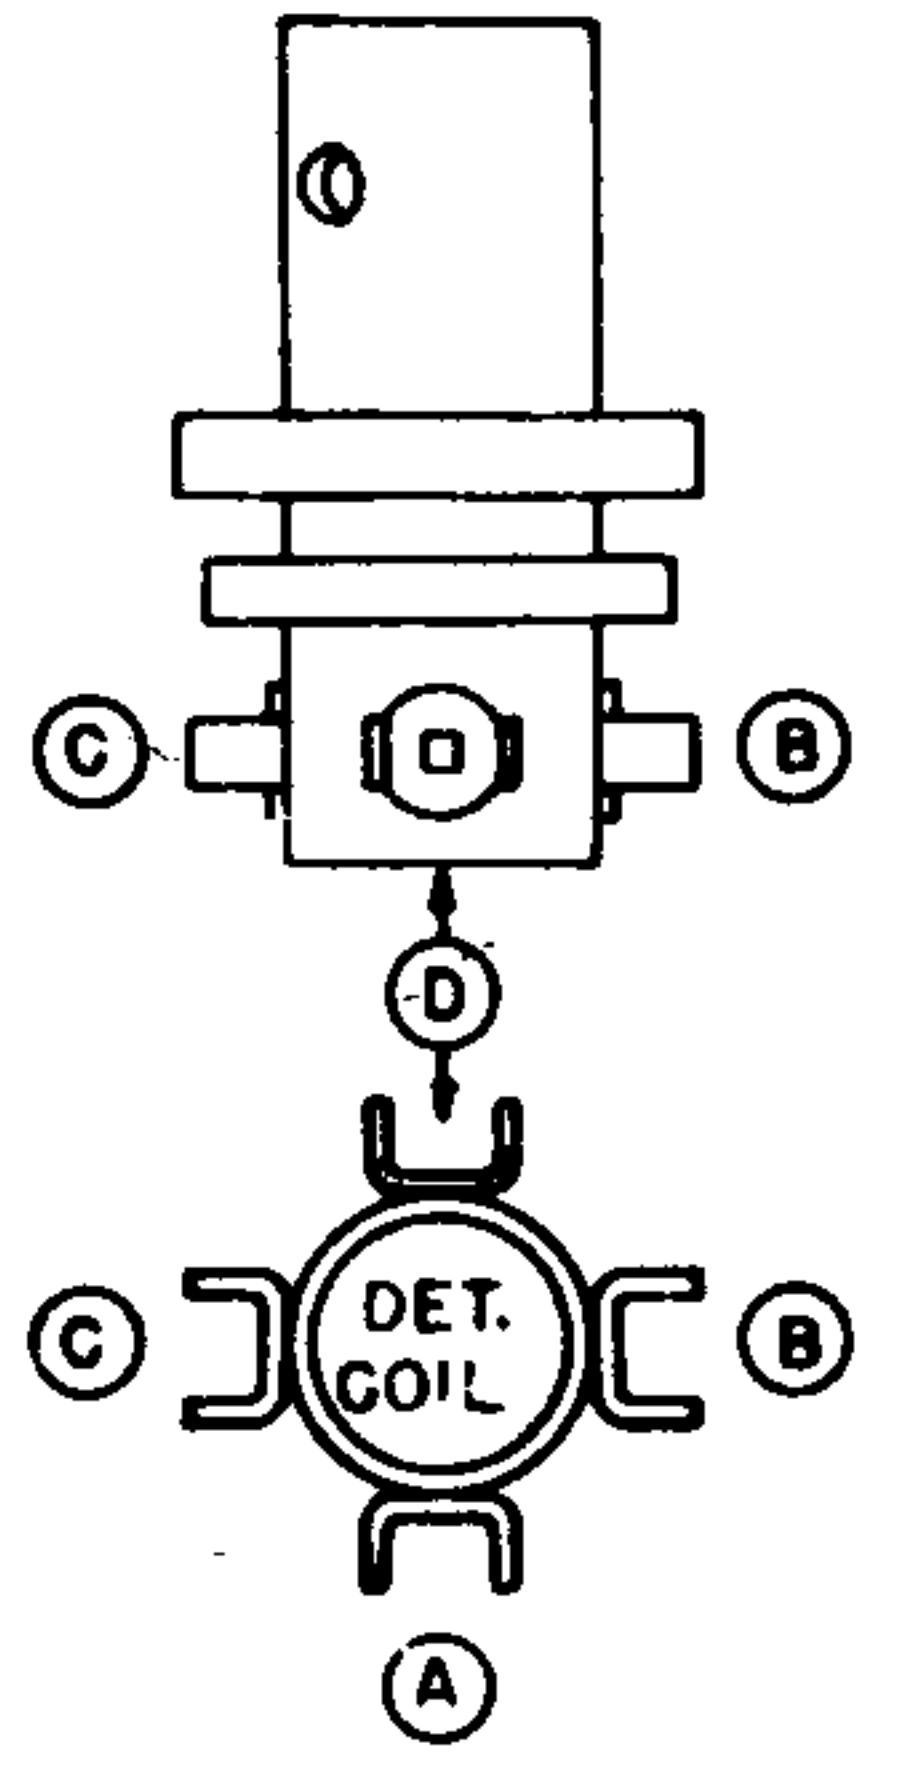

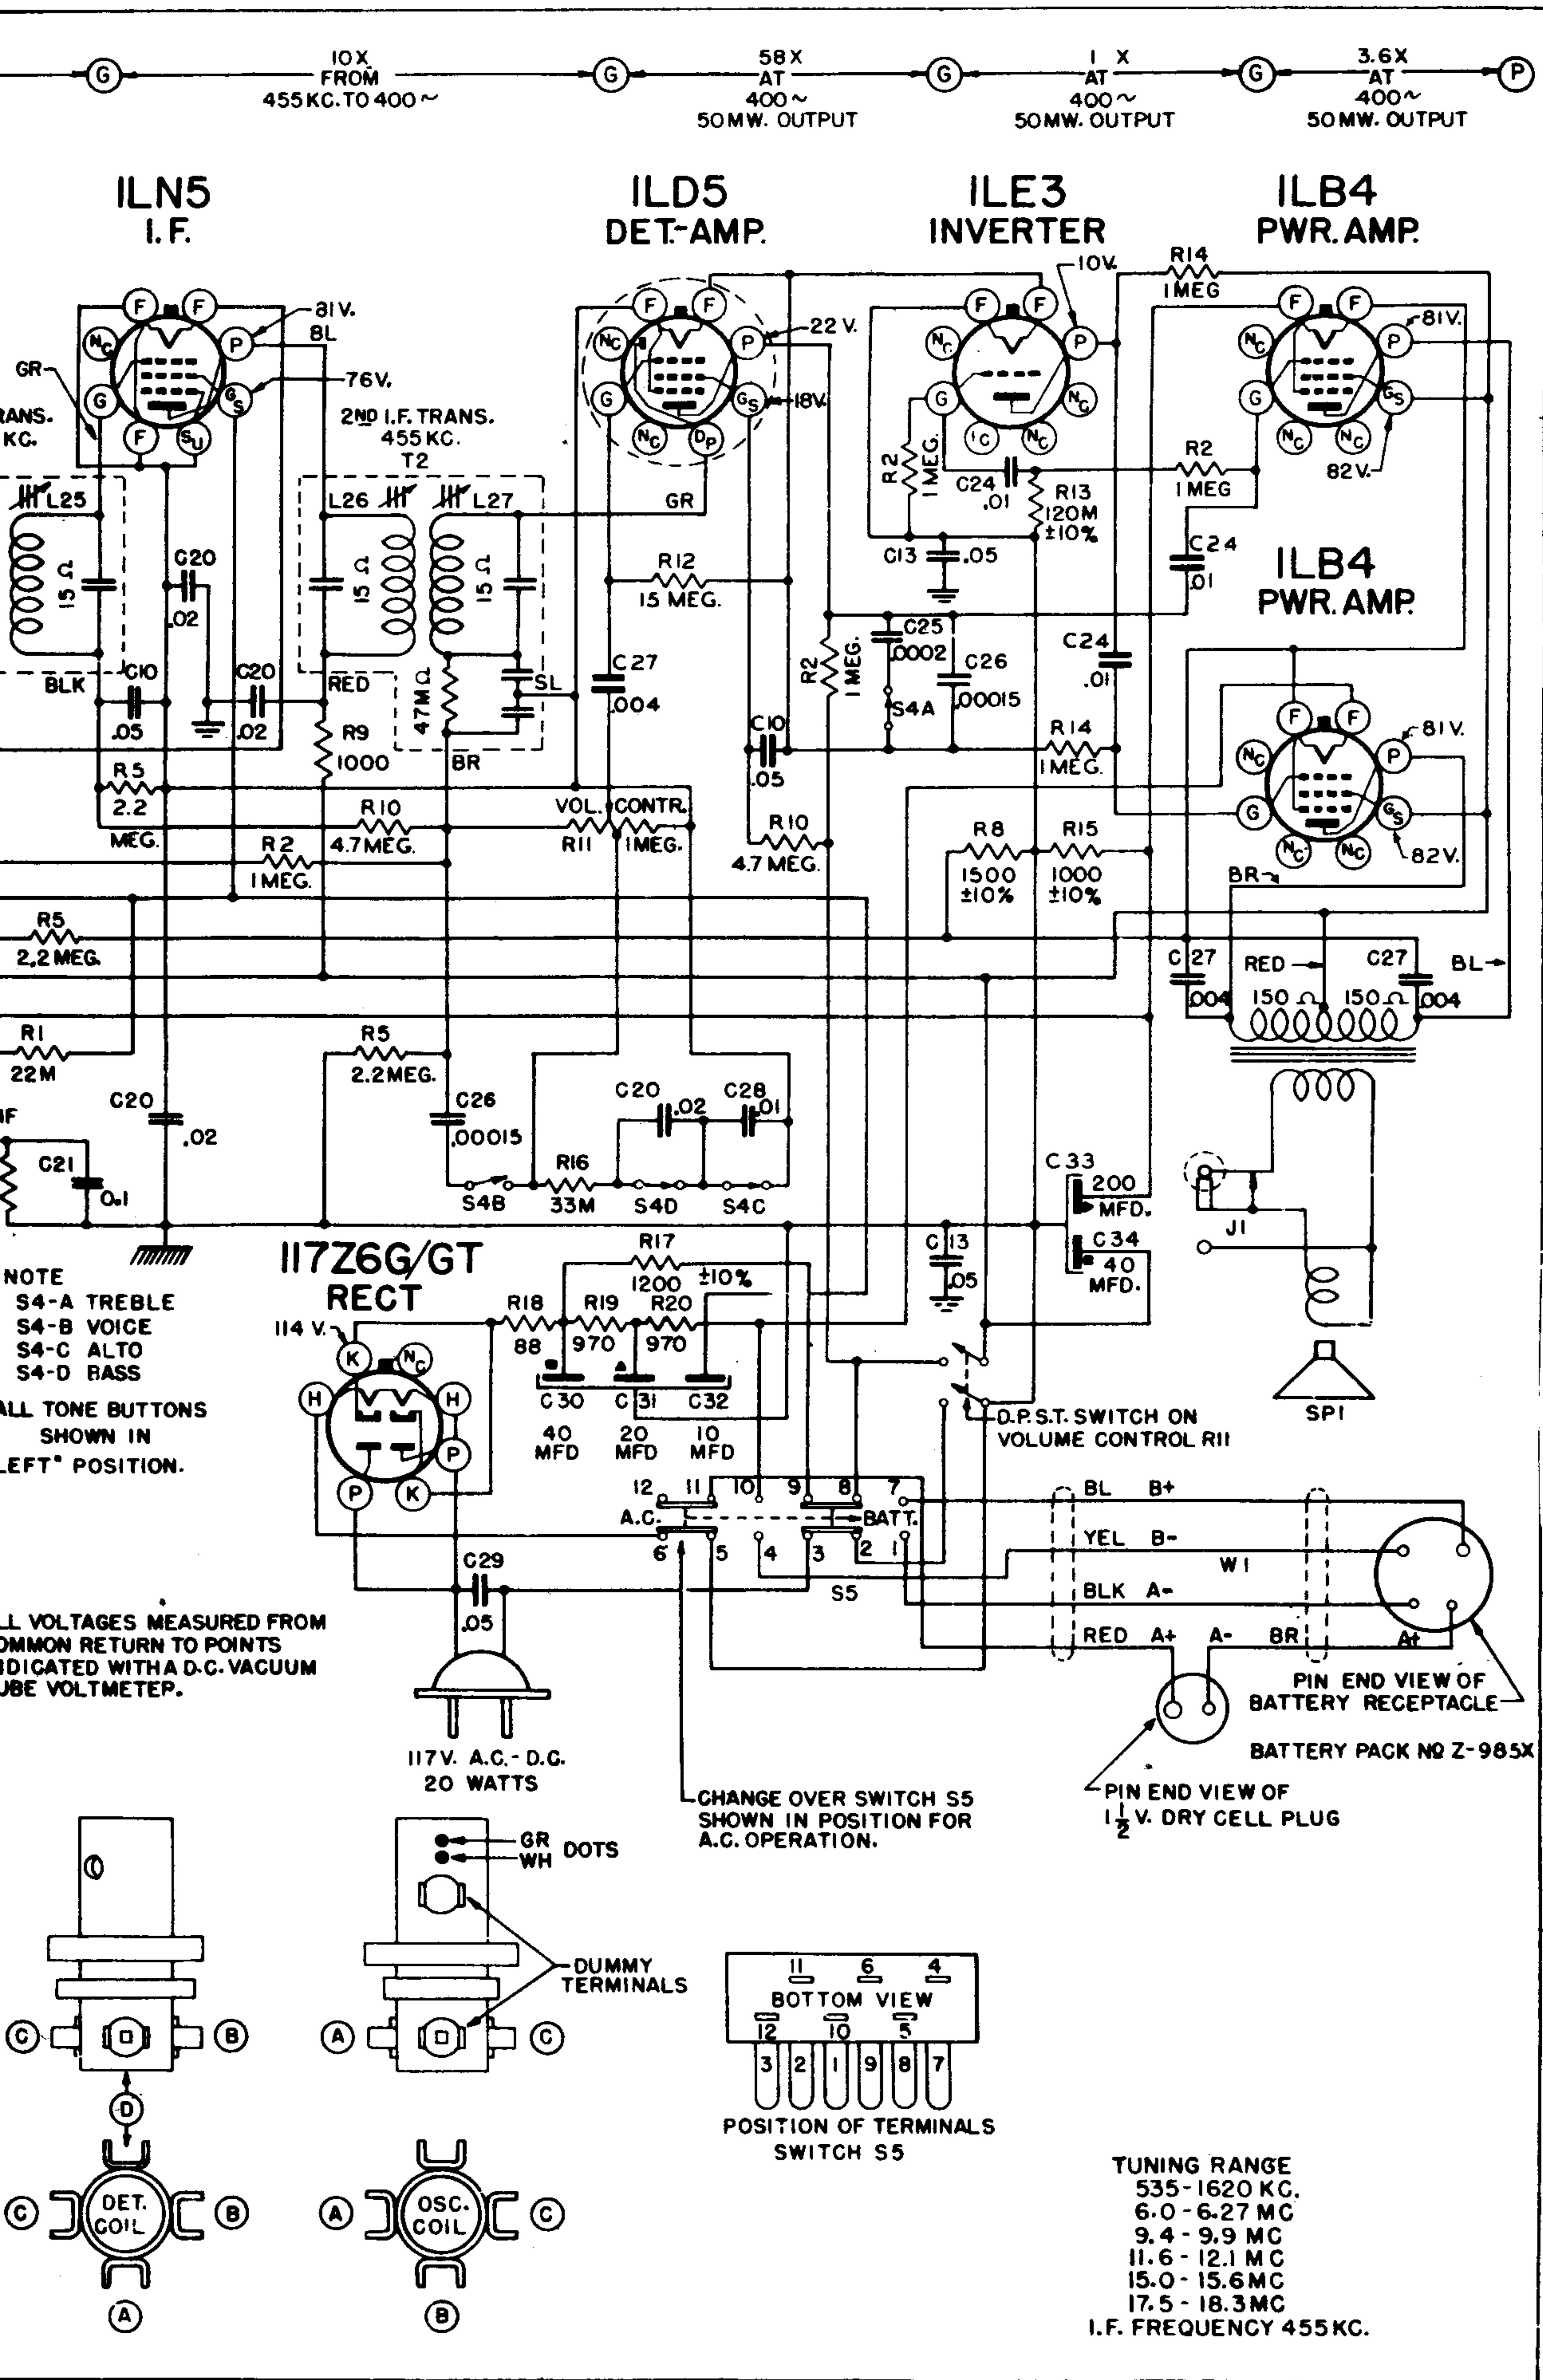

**MODEL 8G005
CHASSIS 8C40**

MODEL 8G005 CHASSIS 8C40

TO THE SERVICE MAN:

Chassis 8C40 features a high gain tuned RF stage ahead of a conventional superheterodyne circuit with band spread tuning on the 49, 31, 25, 19 and 16 meter bands.


The audio amplifier used in chassis 8C40 features phase inversion and push-pull power output.

If removal of the chassis from the cabinet ever becomes necessary this should be done with care.

The alignment of chassis 8C40 is conventional.

However, care must be exercised when making adjustments, and the alignment procedure must be followed exactly. Set the chassis over a metal plate approximately the same distance the battery pack is from the bottom of the chassis when it is in the cabinet. This procedure will introduce the approximate amount of metal in the field of the RF and oscillator coils as when the chassis is in the cabinet. A signal generator of reasonable accuracy and good attenuation must be used. An output meter (AC) of the copper oxide rectifier type with a range of 1 to 30 volts in several steps is necessary to get accurate output readings. Alignment wrenches should be of the non-metallic type, especially when making adjustments at the higher frequencies.

When reinstalling the chassis in the cabinet be careful not to disturb the cabling between the short wave coil assembly and chassis. Tune in a weak broadcast signal near 1400 Kc. and touch up trimmer C9. This will insure maximum performance after alignment.

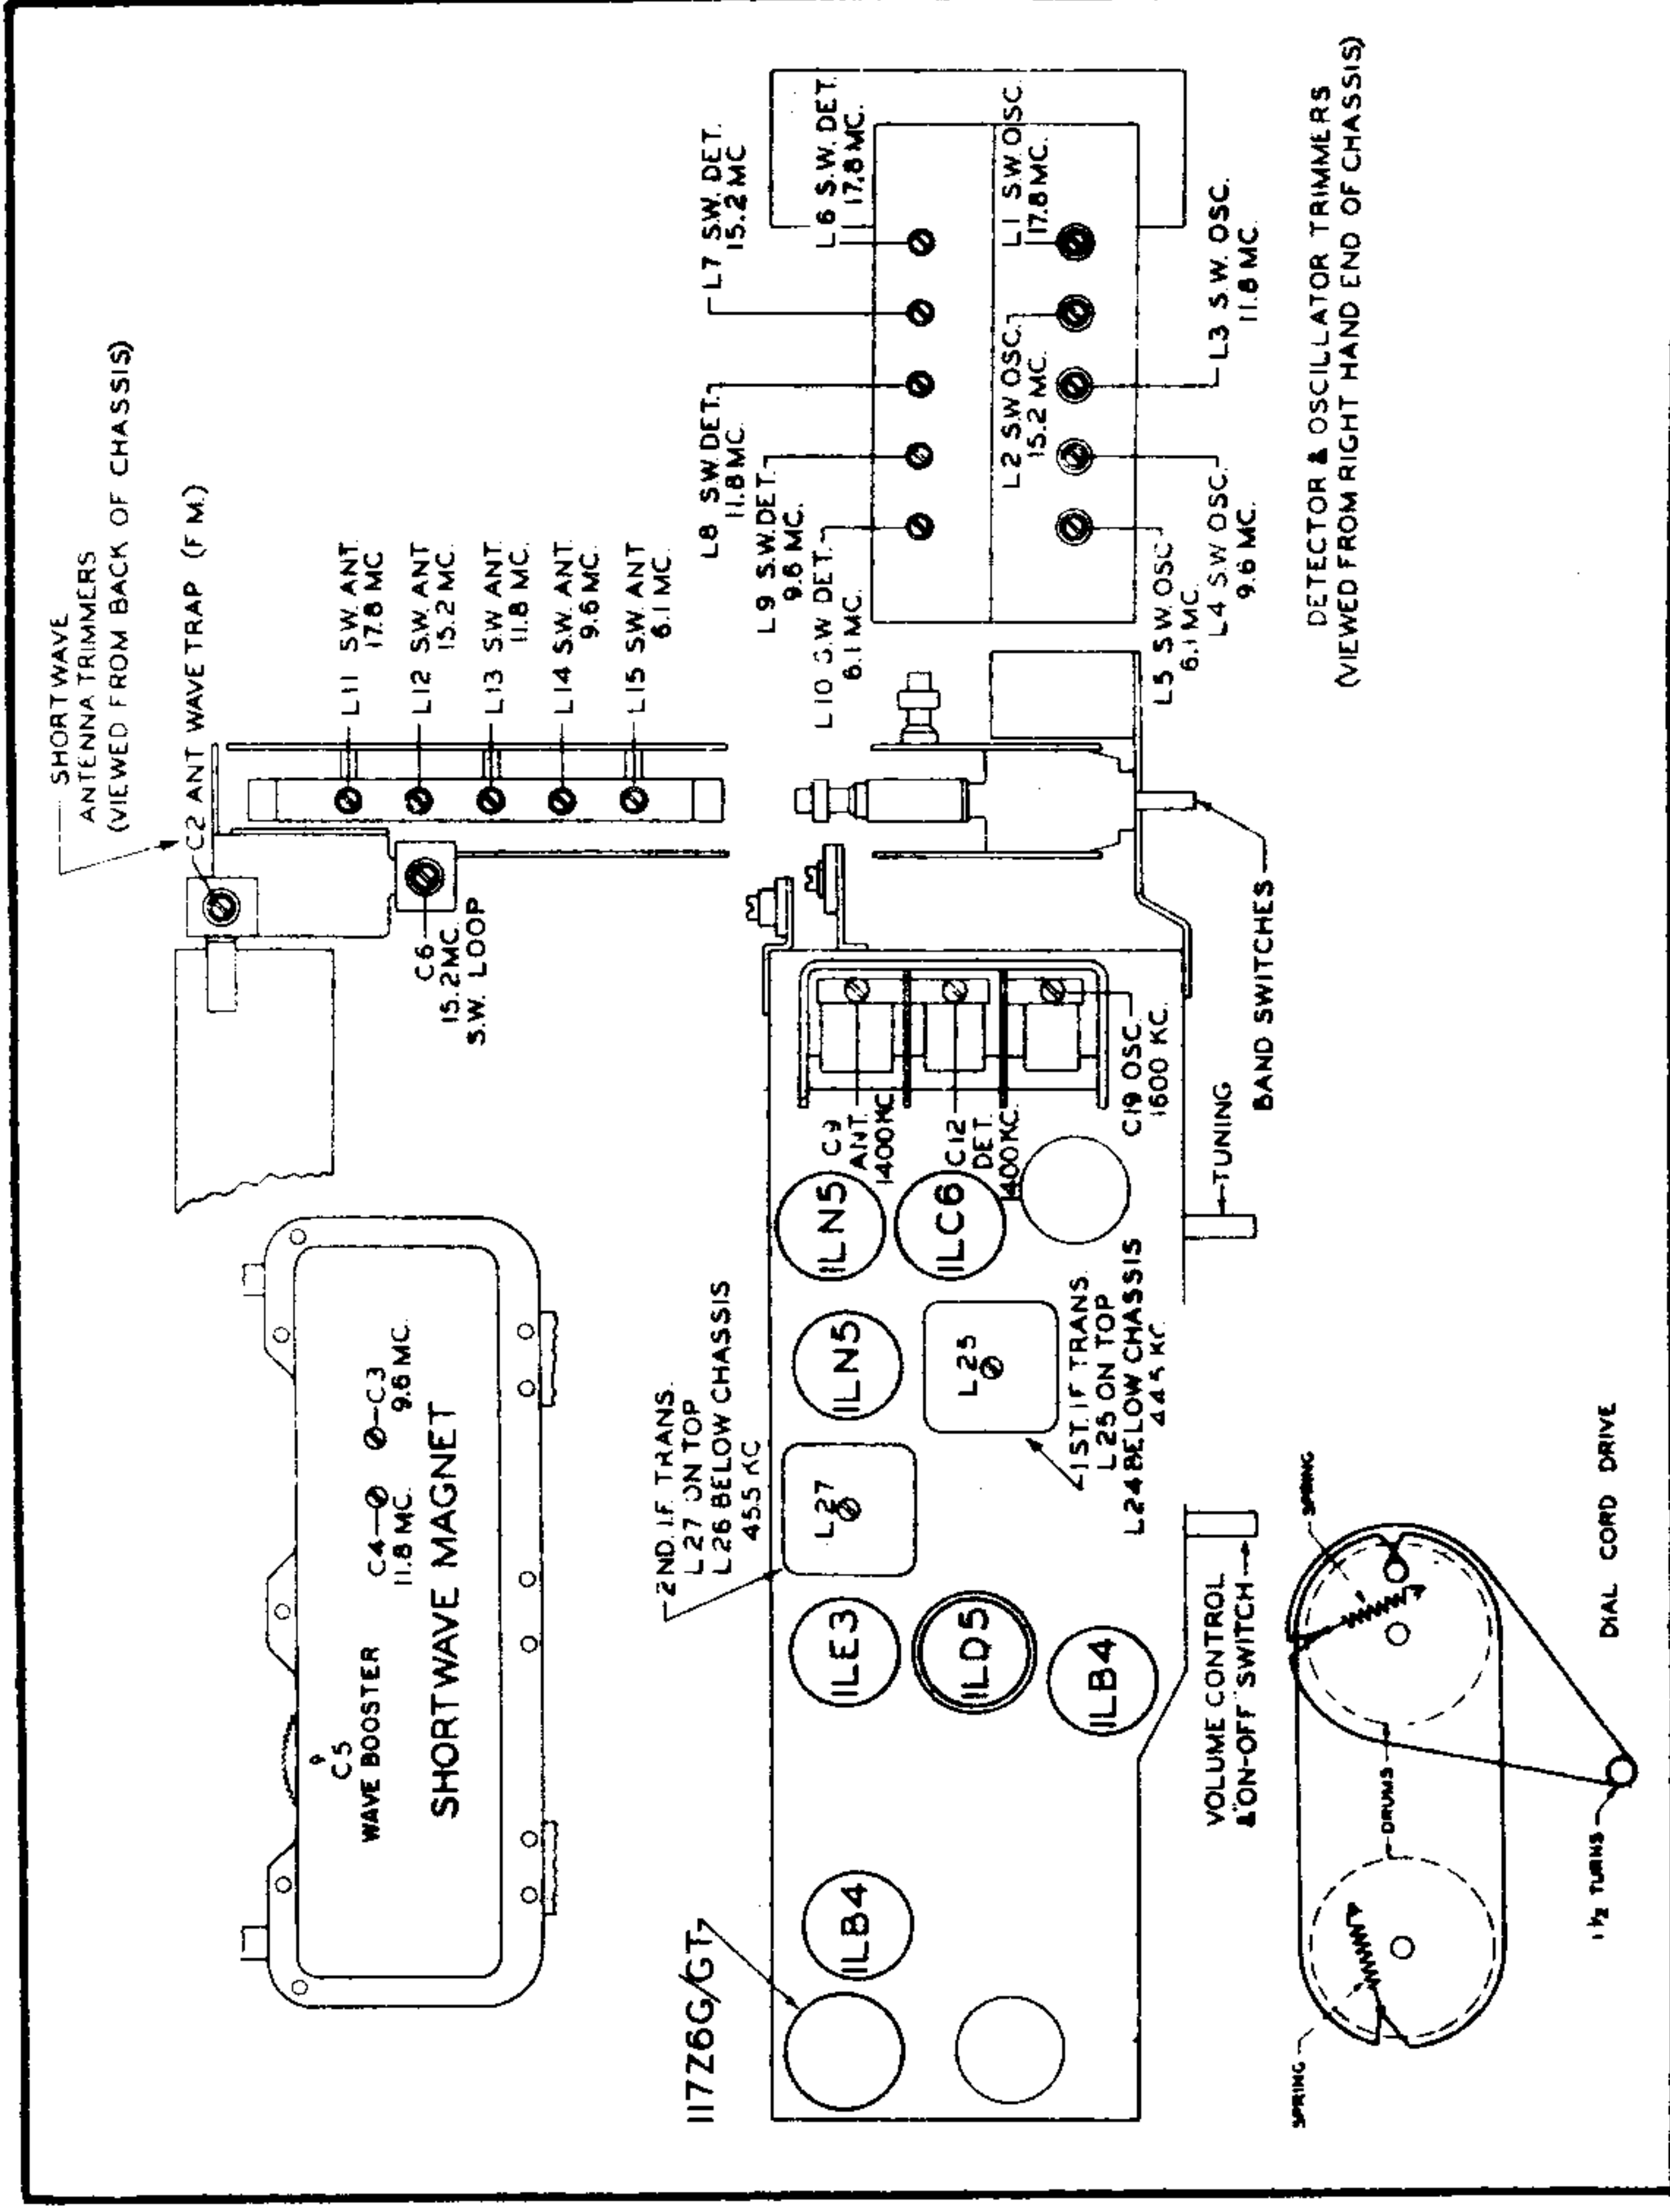

TUBE, TRIMMER LOCATION AND DIAL CABLE DRAWING

ALIGNMENT PROCEDURE

OPERATION	CONNECT OSCILLATOR TO Converter	DUMMY ANTENNA Grid	INPUT FREQ. 455 Kc.	BAND BC	SET DIAL AT 600 Kc.	TRIMMERS L-24, 25, 26, 27	PURPOSE Align I. F. Set Oscillator to Scale
1	One Turn Loop Coupled Loosely to Broadcast Wavemagnet	.1 mfd.	1600 Kc.	BC	1600 Kc.	C-19	Alignment of Detector Sec.
2			1400 Kc.	BC	1400 Kc.	C-12	Alignment of B.C. Wavemagnet
3			1400 Kc.	BC	1400 Kc.	C-9	
4			6.1 Mc.	49 Met.	6.1 Mc.	L-5, L-10, L-15	
5*			9.6 Mc.	31 Met.	9.6 Mc.	L-4, L-9, L-14	
6*			11.8 Mc.	25 Met.	11.8 Mc.	L-3, L-8, L-13	Alignment of S.W. Antenna, Detector and Oscillator
7*	3 Feet of wire Approx. 1 foot from Extended Waverod		15.2 Mc.	19 Met.	15.2 Mc.	L-2, L-7, L-12	
8*			17.8 Mc.	16 Met.	17.8 Mc.	L-1, L-6, L-11	
9*	One Turn Loop Coupled Loosely to Shortwave Magnet, Waverod Collapsed		15.2 Mc.	19 Met.	15.2 Mc.	C-5, C-6	Alignment of Short-wave Magnet
10			11.8 Mc.	25 Met.	11.8 Mc.	C-4	
11			9.6 Mc.	31 Met.	9.6 Mc.	C-3	
12	When Receiving Normal Bands, if FM Interference is Experienced Adjust Wave Trap Trimmer C-2 for Minimum Response of the Interfering Signal.						
13	When Receiving Normal Bands, if FM Interference is Experienced Adjust Wave Trap Trimmer C-2 for Minimum Response of the Interfering Signal.						

*NOTE: Rock Tuning Condenser When Making Alignment Under Operations 5, 6, 7, 8 and 9.